

Role of the local density of optical states in frequency conversion of light in confined media

Emre Yüce,^{1,2,*} Georgios Ctistis,^{1,3} Julien Claudon,^{4,5} Jean-Michel Gérard,^{4,5} Willem L. Vos¹

¹*Complex Photonic Systems (COPS),
MESA+ Institute for Nanotechnology,
University of Twente, P.O. Box 217,
7500 AE Enschede, The Netherlands*

²*Light & Matter Control Group,
Department of Physics,
Middle East Technical University,
06800 Ankara, Turkey*

³*NanoBioInterface Group,
Department of Nanotechnology,
School of Life Science,
Engineering, and Design,
Saxion University of Applied Sciences,
7500 KB Enschede, The Netherlands.*

⁴*Univ. Grenoble Alpes,
INAC-PHELIQS, 38000 Grenoble, France*

⁵*CEA, INAC-PHELIQS,
Nanophysics and Semiconductors Laboratory,
38000 Grenoble, France*

(Dated: April 25th 2016)

Ever since the advent of nonlinear optics, the generation of light by frequency-conversion is drawing continued attention, and leading to emerging applications such as supercontinuum sources for ultrastable clocks and for advanced microscopy. A modern nanophotonic approach employs switching of cavities to convert the frequency of confined light. Apparently, the physics of nanophotonic frequency conversion differs from traditional non-linear optics in at least three key features regarding output spectrum, frequency shift, and the critical time scale. Here, we switch GaAs-AlAs microcavities with a range of quality factors by the electronic Kerr effect, to unify the nanophotonic and traditional non-linear optics regimes. We identify the key role of the local density of optical states (LDOS) available to the newly generated light frequencies. This concept from cavity quantum electrodynamics allows us to present a unified framework for frequency-conversion both in traditional and nanophotonic media. Accordingly, we observe a remarkable color conversion outside the cavity resonance, and demonstrate its operation at THz repetition rates.

The generation of optical frequencies starting from incident light is well-known from nonlinear optics¹⁻³. In self-phase modulation¹, a laser beam causes a nonlinear polarization in a spatially homogeneous nonlinear medium, leading to a temporal modulation of the phase $\phi(t)$ of the incident wave, resulting in an instantaneous frequency shift $\delta\omega(t)$ of the output light equal to the rate of change of the phase $\delta\omega(t) = -\partial\delta\phi(t)/\partial t$. Since the frequency shift increases with incident light intensity and with interaction length, long fibers have become popular media to obtain frequency shifts by means of the electronic Kerr effect^{1,3}.

In nanophotonics, the frequency of confined light is converted by quickly changing the cavity resonance in time⁴⁻¹⁰. As reviewed in Refs.⁴⁻⁶, the physics of nanophotonic frequency conversion apparently differs from traditional nonlinear optics on at least three key features: (1) The output spectrum reveals a discrete peak at each resonance ($\omega = \omega_c$) instead of a continuum as in traditional nonlinear optics. (2) The frequency shift $\delta\omega(t)$ depends on the tuning rate of the resonance $\omega_c(t)$, but not on the tuning rate of the phase ($\partial\delta\phi(t)/\partial t$), as in traditional nonlinear optics. (3) The switch process has a critical speed ∂t that should be faster than the resonance storage time ($\partial t < \tau_c$), a situation that does not pertain to traditional nonlinear optics.

The central question we address here is how to reconcile the apparent differences regard-

ing frequency conversion in traditional homogeneous media with conversion in nanophotonic resonant cavities. Therefore, we study by pump-probe reflectivity the dynamics of the frequency conversion of light confined in GaAs-AlAs microcavities (see Supplementary Information, Sample and Setup). The samples sustain both a cavity resonance and a continuous vacuum density of optical states, which are controlled by a range of quality factors Q . The cavity resonance is switched in time by the electronic Kerr effect that allows for the fastest possible, reversible, and purely dispersive switch.¹¹

Figure 1(a) presents spectra measured at several pump-probe delays Δt . During the switch event, the cavity resonance rapidly shifts by 5.7 cm^{-1} to a lower frequency at maximum pump-probe overlap, in agreement with the positive non-degenerate Kerr coefficient of GaAs.¹² The resonance returns to the starting frequency immediately after the pump pulse has gone. The overlap is maximal at $\Delta t = -100 \text{ fs}$, since it takes incident probe light about 100 fs to charge the cavity. Escaping frequency-converted light is collected in reflection geometry, where it interferes with probe light that directly reflects from the top Bragg mirror. The interference corresponds to a phase-sensitive heterodyning that allows us to sensitively detect frequency-converted light outside the instantaneous resonance, and to observe signal over a much longer time (up to 2 ps) than the cavity storage time ($\tau_c = 300 \text{ fs}$).

The detected signal is the frequency-resolved transient reflectivity $R^t(\omega)$.¹³ For the unswitched cavity, $R^t(\omega) = 100\%$ outside the resonance. Figure 1(a) reveals a remarkable transient reflectivity $> 100\%$ at $\Delta t = -100 \text{ fs}$ delay and at frequencies *above* the cavity resonance. Simultaneously and in keeping with energy conservation, the signal is depleted at frequencies below the cavity resonance, thus indicating a blue shift of confined light. At another delay $\Delta t = -500 \text{ fs}$, excess transient reflectivity occurs *below* the cavity resonance with a simultaneous depletion above the resonance, thus signaling red-conversion of confined light. The cavity-confined light is blue-converted (or red-converted) by as much as 50 cm^{-1} , much greater than the $\delta\omega_c = 5.7 \text{ cm}^{-1}$ shift of the cavity resonance. This spectral observation contradicts the previous nanophotonic view of output peaked at the cavity resonance (key feature (1)).

Figure 1(b) shows a map of measured transient reflectivity spectra versus pump-probe delay Δt . Blue-converted light occurs at time delays between -100 fs and $+100 \text{ fs}$. Here the cavity resonance frequency ω_c increases, thus the confined light experiences a decreasing refractive index, and a concomitant negative phase change ($\partial\delta\phi(t)/\partial t < 0$). Red-shifted light

appears between $\Delta t = -900$ fs and -100 fs, where ω_c decreases. Here the confined light experiences an increasing refractive index, and thus a positive phase change ($\partial\delta\phi(t)/\partial t > 0$). Near $\Delta t < -500$ fs, both blue- and red-shifted light appear, since the refractive index both increases and decreases while the probe light circulates in the cavity. Here, the magnitude of the red-shifted light is larger than for the blue-shifted light, since the pump pulse first induces an increasing and then a decreasing refractive index while the stored light escapes from the cavity. To confirm these observations, we have calculated the nonlinear frequency conversion (see Fig. 1(c)) with a time-resolved model using only the pump fluence as an adjustable parameter¹⁴. Our calculated spectra reveal blue- and red-converted light at the same frequencies, same bandwidth, and timing as in the measurements (Fig. 1(b)). As the timing of the blue- or red-conversion corresponds to the occurrence of a positive or a negative rate of change of the phase ($\partial\delta\phi(t)/\partial t$) (key feature (2)), one might naively conclude that the cause of the frequency shift is settled in favor of traditional phase modulation, even though we employ a microcavity. We will now see that this is not the case.

Figure 2 shows the blue-converted signal as a function of inverse quality factor ($1/Q$). It is remarkable that the amount of frequency-converted light is inversely proportional with Q . In nanophotonics, the quality factor Q is known to gauge the local density of optical states (LDOS) on resonance at the cavity center $\rho_c(\omega_c, z_c)$, and it plays a central role in the Purcell effect^{15,16}. However, this notion implies that the signal decreases with increasing LDOS, which is at odds with cavity quantum electrodynamics (QED). In contrast, we find that the LDOS at frequencies *outside* the resonance can be identified with $1/Q$ (see Supplementary Information, Theory). This contribution includes the LDOS-continuum from the surrounding vacuum $\rho_v(\omega, z_c)$ that tunnels into the cavity through the Bragg mirrors¹⁷. This new concept, combined with our observations in Fig. 2 indicates that the color-converted intensity increases with the vacuum LDOS. The increasing intensity of frequency-converted light with $1/Q$ does not agree with the traditional nonlinear argument (rate of change of the phase), since the rate is the same for all cavities. Our identification that the LDOS plays a central role in nonlinear color-conversion in confined media is a novel nanophotonic key aspect of nonlinear optics.³

Fig. 2 also shows that the amount of frequency-converted light increases with pump pulse fluence. This is understood from the third-order electronic-Kerr nonlinearity. The induced nonlinear polarization is expanded in the nonlinear index $n = n_0 + n_2 \cdot I_{pu}$ that increases

linearly with pump fluence I_{pu} .³ At constant pump pulse duration, an increased refractive index corresponds to an increased rate of change of the phase ($\partial\delta\phi(t)/\partial t$), and thus an increased frequency shift. Regarding key feature (2), we thus conclude that the frequency shift and intensity are related to both the LDOS and the rate of change of the phase.

To generalize our new insights, we have performed numerical calculations (see Supplementary Information, Theory). We reveal the united effect of both the LDOS and the nonlinear polarization by tuning Q and the switch pulse duration. Tuning Q provides the means for changing the bandwidth of the resonant LDOS $\rho_c(\omega, z_c)$ and the amplitude of the vacuum LDOS $\rho_v(\omega, z_c)$. Independently, we control the bandwidth of the nonlinear polarization $P^{NL}(\omega_{pr})$ by tuning the switch pulse duration. Results for a low- Q cavity switched by a long pulse are shown in Fig. 3(a-c). We see that the LDOS and the polarization conspire to yield a broad red-shifted frequency conversion down to 7740 cm^{-1} , with a concomitant blue depletion as far as 7860 cm^{-1} . While one naturally expects a cavity to be active over one linewidth $\Delta\omega_c$, Fig. 3 shows that this intuition is erroneous; the bandwidth of frequency conversion strongly exceeds the cavity linewidth ($\Delta\omega_c = 18 \text{ cm}^{-1}$), confirming our observation that light is generated in a continuum outside the cavity resonance. It appears that a much broader extent of the cavity LDOS spectrum is significant to frequency conversion, which notably includes the vacuum LDOS that tunnels into the cavity $\rho_v(\omega, z_c)$, see Fig. 3(g). These results shed new light on the frequency-conversion spectrum (key feature (1)): the spectral output is much broader than the resonance and the internal color conversion is given by $P^{NL} \cdot \rho_c(\omega, z_c)$, which agrees well with the numerical results.

To understand the role of the quality factor, we show in Fig. 3(d-f) data for a high- Q cavity with the same nonlinear polarization and mode volume as in Fig. 3(a-c). The LDOS is narrow and strongly pronounced: on resonance the LDOS is an order of magnitude larger, and off-resonance an order of magnitude lower than in Fig. 3(a), in agreement with the Q -related LDOS scaling above. The LDOS is thus dominated by the cavity resonance, while the role of the vacuum LDOS $\rho_v(\omega, z_c)$ is limited. Indeed, the frequency-converted spectrum in (Fig. 3(e)) is narrow, mostly within the cavity, as in Ref.⁶. The frequency-integrated conversion Fig. 3(f) is much smaller than for the low- Q cavity (Fig. 3(c)), in agreement with the $1/Q$ -scaling of our observations in Fig. 2. The LDOS is so narrow that it has little overlap with P^{NL} , which explains the low frequency-integrated conversion. In the time domain, this means that the resonance storage time τ_c is not matched to the duration of

the pump pulse. Hence, ultrafast frequency conversion of light is optimal for a fast cavity storage time matched to the pulse duration ($\tau_{pu} \simeq \tau_c$), as opposed to prior statements on key feature (3) above.

To illuminate the role of the nonlinear polarization that is central in traditional nonlinear optics, we present in Fig. 3(g-i) results for a low- Q microcavity (as in Fig. 3(a)), with a broad P^{NL} (bandwidth $> 400 \text{ cm}^{-1}$). In agreement with our analytic model, we find a broader internally generated spectrum (Fig. 3(h)) and external spectrum (Fig. 3(i)) compared to Fig. 3(b) and Fig. 3(c). Due to the fast switching times, the bandwidth of the nonlinear polarization is broader, thus red-shifted light extends beyond 7600 cm^{-1} , and blue depletion is observed below 8000 cm^{-1} . These results indicate that in the limiting case of a broadband LDOS typical of a homogeneous material, the output spectrum is determined by the nonlinear polarization, a situation typical for nonlinear optics in fibers.

We observe in Figs. 3(b,e,h) a very good agreement between the numerical results and the analytic frequency-conversion proportional to the product ($P^{NL} \cdot \rho_c(\omega, z_c)$). Considering by analogy Fermi's golden rule in cavity QED, one may wonder why the converted intensity is not proportional to the nonlinear polarization squared, assuming P^{NL} to play the role of a transition dipole moment^{16,18}. For Fermi's golden rule to hold, however, requires the bandwidth of the LDOS resonance to be much broader than the dipole bandwidth, known as the weak-coupling or Markov approximation¹⁹. The inequality is strongly violated in the present study, where the polarization bandwidth is comparable to the LDOS bandwidth. When the Markov approximation is violated, the intensity may strongly differ from Fermi's golden rule. For a homogeneous medium with a smooth LDOS, however, we expect an analogy to Fermi's golden rule to hold; indeed such a relation can be identified in Ref.²⁰.

Recently, we have reported that the electronic Kerr effect allows for repeated switching of a cavity resonance at THz rates²¹. We have extended this technique to generate short trains of very fast - Terahertz - repeated frequency-shifted pulses, as shown in Figure 4, which is a first application of the new physics uncovered above. Moreover, since probe light stored in the cavity experiences solely a real refractive index, prospects are favorable to extend resonance-aided frequency conversion to single photons and other delicate quantum states of light, and to explore graphene as the switching medium²², thus opening novel opportunities in quantum optics and cavity QED.

-
- [1] Stolen, R. H. & Lin, C. Self-phase-modulation in silica optical fibers. *Phys. Rev. A* **17**, 1448–1453 (1978).
- [2] Dudley, J. M., Genty, G. & Coen, S. Supercontinuum generation in photonic crystal fiber. *Rev. Mod. Phys.* **78**, 1135–1184 (2006).
- [3] Boyd, R. *Nonlinear Optics* (Academic Press, London, 2008), 3 edn.
- [4] Notomi, M. & Mitsugi, S. Wavelength conversion via dynamic refractive index tuning of a cavity. *Phys. Rev. A* **73**, 051803(R) (2006).
- [5] Dong, P., Preble, S. F., Robinson, J. T., Manipatruni, S. & Lipson, M. Inducing photonic transitions between discrete modes in a silicon optical microcavity. *Phys. Rev. Lett.* **100**, 033904–1–4 (2008).
- [6] Tanabe, T., Notomi, M., Taniyama, H. & Kuramochi, E. Dynamic release of trapped light from an ultrahigh-Q nanocavity via adiabatic frequency tuning. *Phys. Rev. Lett.* **102**, 043907–1–4 (2009).
- [7] Preble, S. F., Xu, Q. & Lipson, M. Changing the colour of light in a silicon resonator. *Nature Photon.* **1**, 293–296 (2007).
- [8] McCutcheon, M. W., Pattantyus-Abraham, A. G., Rieger, G. W. & Young, J. F. Emission spectrum of electromagnetic energy stored in a dynamically perturbed optical microcavity. *Opt. Express* **15**, 11472–11480 (2007).
- [9] Eilenberger, F., Kabakova, I. V., de Sterke, C. M., Eggleton, B. J. & Pertsch, T. Cavity optical pulse extraction: ultra-short pulse generation as seeded Hawking radiation. *Sci. Rep.* **3**, 1–8 (2013).
- [10] Moille, G., Combrié, S., Morgenroth, L., Lehoucq, G., Neuilly, F., Hu, B., Decoster, D. & de Rossi, A. Integrated all-optical switch with 10 ps time resolution enabled by ALD. *Laser Photonics Rev.* 1–11 (2016).
- [11] Ctistis, G., Yüce, E., Hartsuiker, A., Claudon, J., Bazin, M., Gérard, J.-M. & Vos, W. L. Ultimate fast optical switching of a planar microcavity in the telecom wavelength range. *Appl. Phys. Lett.* **98**, 161114 (2011).
- [12] Yüce, E., Ctistis, G., Claudon, J., Dupuy, E., Boller, K.-J., Gérard, J.-M. & Vos, W. L. Competition between electronic Kerr and free carrier effects in an ultimate-fast optically

- switched semiconductor microcavity. *J. Opt. Soc. Am. B* **29**, 2630–2642 (2012).
- [13] Euser, T. G., Harding, P. J. & Vos, W. L. Broadband sensitive pump-probe setup for ultrafast optical switching of photonic nanostructures and semiconductors. *Rev. Sci. Instrum.* **80**, 073104 (2009).
 - [14] Yüce, E., Ctistis, G., Claudon, J., Gérard, J.-M. & Vos, W. L. Optimal all-optical switching of a microcavity resonance in the telecom range using the electronic Kerr effect. *Opt. Express* **24**, 239–253 (2016).
 - [15] Purcell, E. M. Spontaneous emission probabilities at radio frequencies. *Phys. Rev.* **69**, 681 (1946).
 - [16] Gérard, J.-M., Sermage, B., Gayral, B., Legrand, B., Costard, E. & Thierry-Mieg, V. Enhanced spontaneous emission by quantum boxes in a monolithic optical microcavity. *Phys. Rev. Lett.* **81**, 1110–1113 (1998).
 - [17] Yeganegi, E., Lagendijk, A., Mosk, A. P. & Vos, W. L. Local density of optical states in the band gap of a finite one-dimensional photonic crystal. *Phys. Rev. B* **89**, 045123 (2014).
 - [18] Hennessy, K., Badolato, A., Winger, M., Gerace, D., Atatüre, M., Gulde, S., Fält, S., Hu, E. L. & Imamoglu, A. Quantum nature of a strongly coupled single quantum dot-cavity system. *Nature* **445**, 896–899 (2007).
 - [19] Khitrova, G., Gibbs, H. M., Kira, M., Koch, S. W. & Scherer, A. Vacuum Rabi splitting in semiconductors. *Nat. Phys.* **2**, 81–90 (2006).
 - [20] Mizrahi, V. & Sipe, J. E. Phenomenological treatment of surface second-harmonic generation. *J. Opt. Soc. Am. B* **5**, 660–667 (1988).
 - [21] Yüce, E., Ctistis, G., Claudon, J., Dupuy, E., Buijs, R. D., de Ronde, B., Mosk, A. P., Gérard, J.-M. & Vos, W. L. All-optical switching of a microcavity repeated at terahertz rates. *Opt. Lett.* **38**, 374–376 (2013).
 - [22] Malic, E., Winzer, T., Bobkin, E. & Knorr, A. Microscopic theory of absorption and ultrafast many-particle kinetics in graphene. *Phys. Rev. B* **84**, 205406 (2011).

Supplementary Information is linked to the online version of this paper at www.nature.com/nature

Acknowledgements We thank Alex Gaeta, Ad Lagendijk, Allard Mosk, Emanuel Peinke, Henri Thyrrestrup, and Elahe Yeganegi for discussions. This research was supported by FOM, ERC, NWO-Nano, and STW.

Author Contributions All authors take full responsibility for the content of the paper.

Author Information Reprints and permissions information is available at npg.nature.com/reprintsandpermissions. Correspondence and requests for materials should be addressed to e.yuce@metu.edu.tr, w.l.vos@utwente.nl; www.photonicbandgaps.com.

Competing financial interests The authors declare no competing financial interests.

Figures

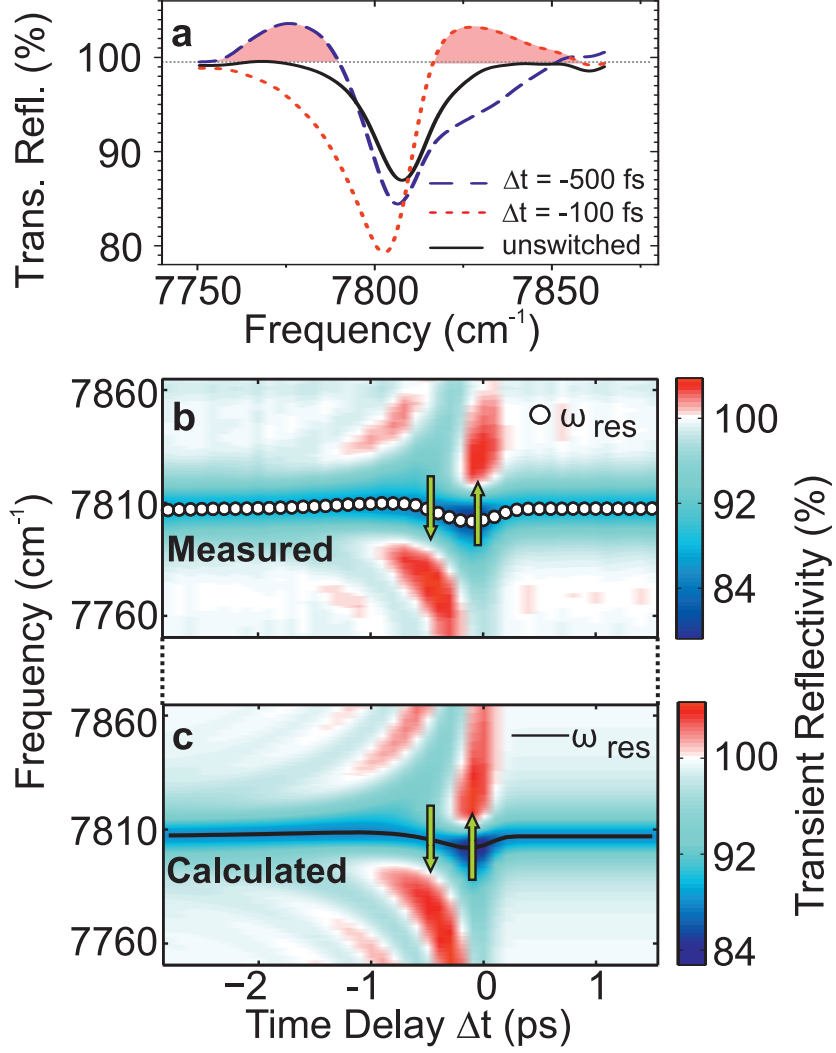


Figure 1: Observations of frequency conversion of light confined in a $Q = 390$ microcavity. (a) Transient reflectivity spectra $R^t(\omega)$ measured at different time delays, and unswitched reference at $\Delta t = 2.8$ ps where pump and probe pulses do not overlap. The unswitched cavity resonance is at $\omega_c/2\pi c = 7807.5$ cm⁻¹ ($\lambda_c = 1280.8$ nm). The reflectivity minimum on resonance ($R_{\min}^t = 85$ %) is high due to the asymmetric cavity design¹⁴. Newly converted light is apparent as $R^t(\omega) > 100\%$ (pink filled). (b, c) Maps of measured and calculated transient reflectivity versus time delay, respectively. Green arrows indicate the direction of frequency conversion. White symbols (b) and the solid curve (c) mark the dynamic resonance frequency of the cavity: $\omega_c(t)$.

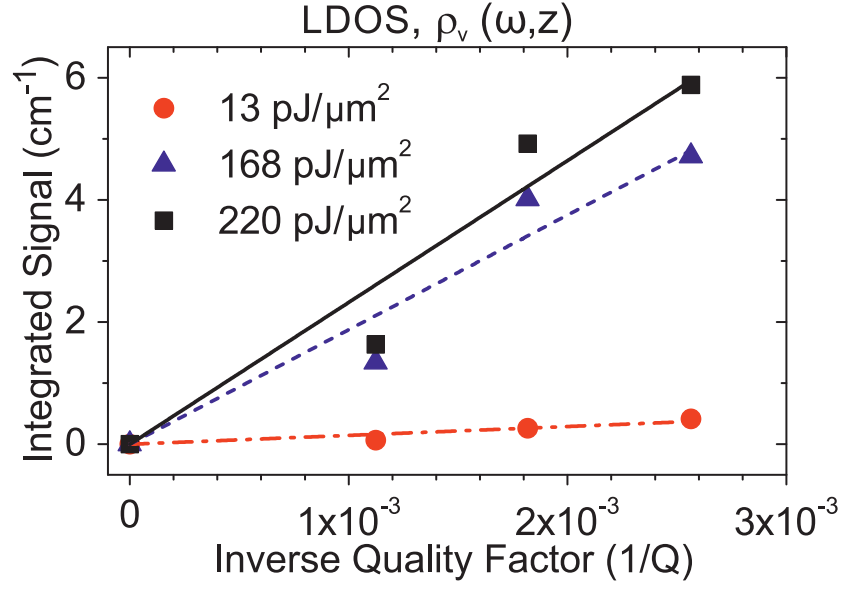


Figure 2: Measured integrated blue-converted light, averaged over time delay between $\Delta t = -100$ and 0 fs and integrated over frequency, versus inverse quality factor $1/Q$. Data are shown for pump pulse fluences 13, 168, and 220 pJ/μm² (circles, triangles, squares), and lines are linear fits to the data, respectively.

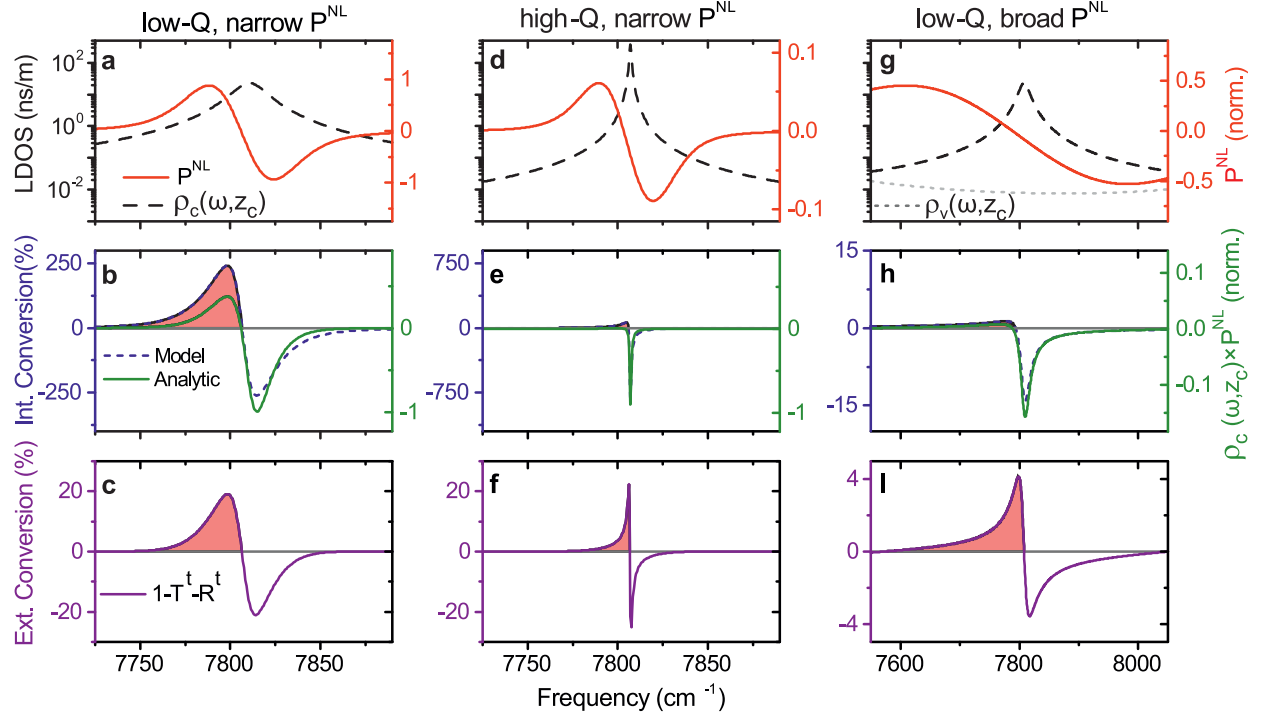


Figure 3: *Effects of LDOS and nonlinear polarization on optical frequency conversion.* Panels (a,d,g) show the LDOS at the cavity center $\rho_c(\omega, z_c)$ (black long-dashed curves), the vacuum LDOS $\rho_v(\omega, z_c)$ (gray dots), the normalized nonlinear polarization (P^{NL}) (red curves). Panels (b,e,h) show internal color conversion and analytic spectra at the cavity center. Blue short-dash curves are the results of our numerical model, the green curve is the analytic model ($P^{NL} \cdot \rho_c(\omega, z_c)$) (P^{NL} and $P^{NL} \cdot \rho_c(\omega, z_c)$ are normalized to the maximum in each row). Panels (c,f,i) show color-conversion spectra outside the cavity calculated as $(1 - T^t - R^t)$ (purple curves), where red filled regions highlight the color-converted light. In absence of color conversion the external conversion is $(1 - T^t + R^t = 0)$. Panels (a-c) pertain to a low- Q cavity ($Q = 400$) with a long pump ($\tau_{pu} = 900$ fs), (d-f) to a high- Q cavity ($Q = 7000$) with the same pump ($\tau_{pu} = 900$ fs), and (g-i) to the same low- Q cavity ($Q = 400$) with a short pump ($\tau_{pu} = 50$ fs). Calculations are performed at $\Delta t = -30$ fs for a probe duration of $\tau_{pr} = 30$ fs.

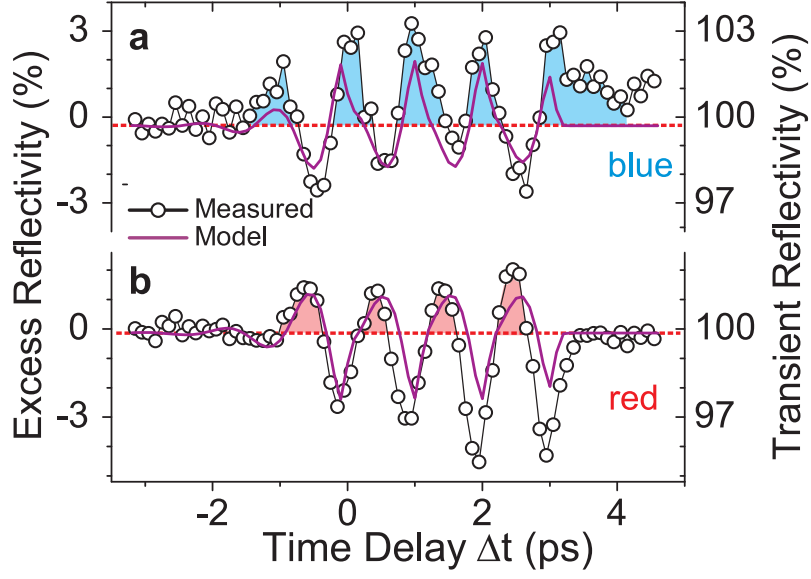


Figure 4: THz repeated (a) blue- and (b) red-converted light pulses versus time delay Δt . The cavity is repeatedly switched by two pump pulses separated by $\delta t_{pu} = 1.0$ ps, while being probed by two pulses separated by $\delta t_{pr} = 2.0$ ps. Solid curves are $R^t(\omega)$ calculated with our dynamic model, filled regions highlight the frequency-converted pulses, horizontal dashed lines represent unswitched reflectivity at 100%.